


Materijal	GG 25, GGG 40
Nazivni prečnik	DN 50 – 600
Nazivni pritisak	PN 10, PN 16
Standard	JUS CJ1.068, DIN 28638, EN 545
Zaštitni premaz	bitumen, EPOXY prah

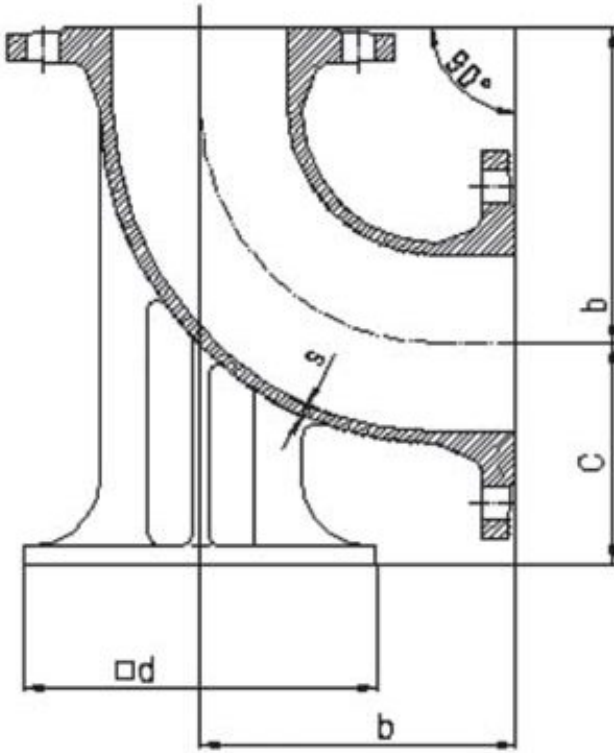


<b>DN</b>	<b>b</b>	<b>c</b>	<b>d</b>
-----------	----------	----------	----------


<b>Nodularni liv</b>	<b>Sivi liv</b>		
50	150	95	150

65	165	100	165
----	-----	-----	-----

80	165	110	180
----	-----	-----	-----

100	180	125	200
-----	-----	-----	-----

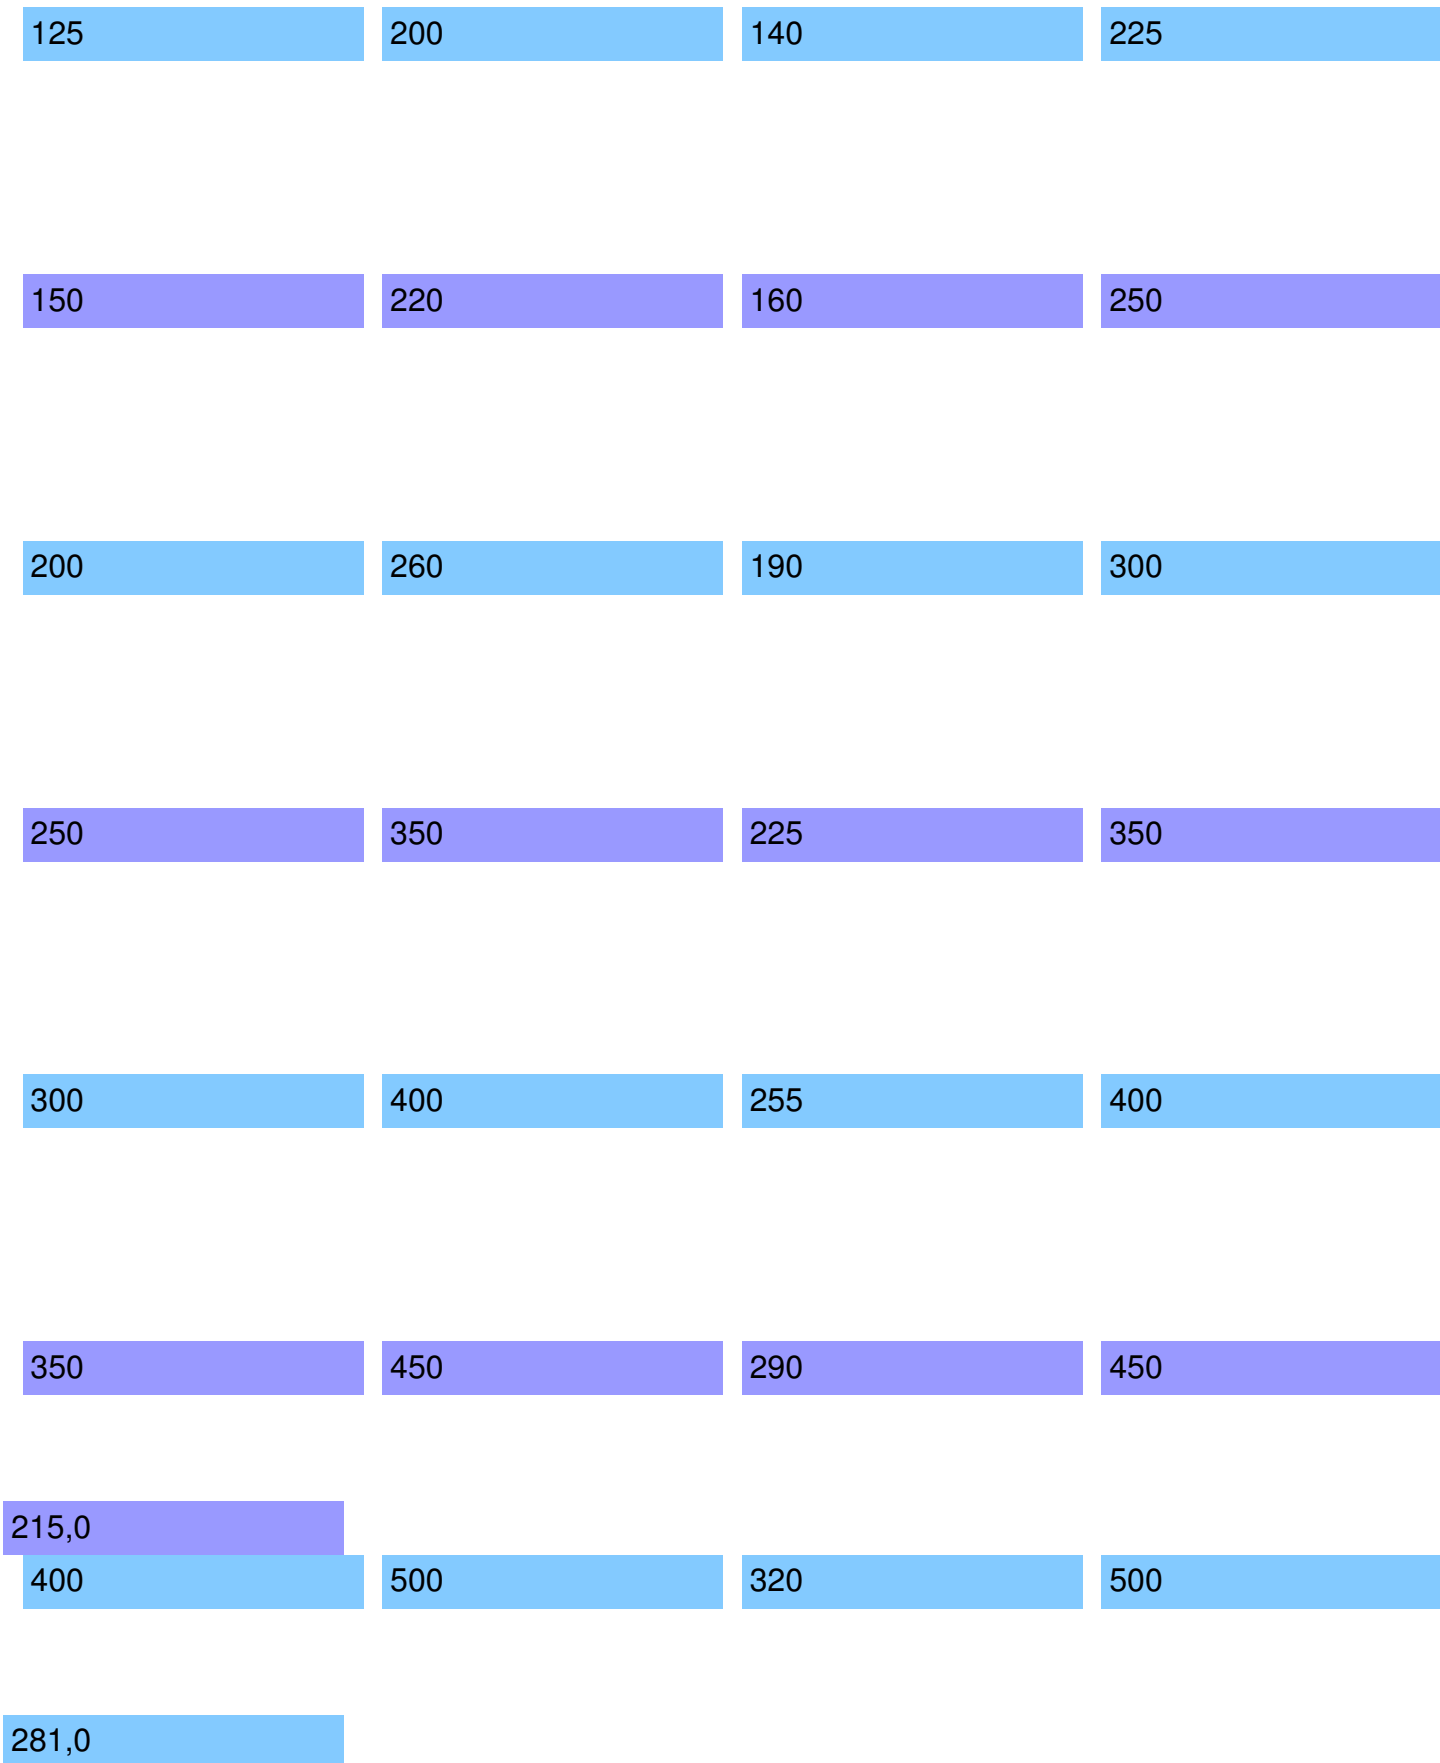

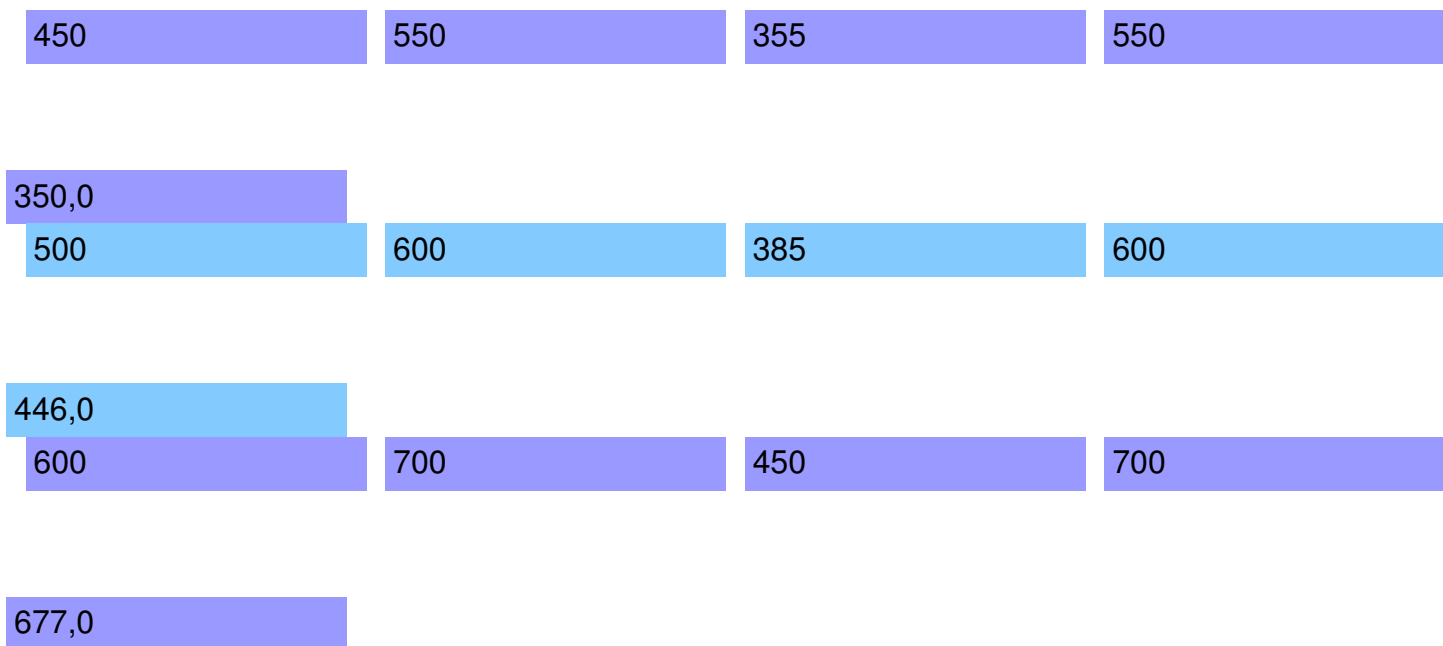

**Težine elemenata mogu varirati u zavisnosti od proizvođača.**