

LP8 (FFK) 45° Luk sa prirubicama

Materijal GG 25, GGG 40

Nazivni prečnik DN 50 – 800

Nazivni pritisak PN 10, PN 16

Standard JUS CJ1.065, DIN 28639, EN 545

Zaštitni premaz


bitumen, EPOXY prah



DN	b	s	Težina u kp
----	---	---	-------------

Nodularni liv	Sivi liv
---------------	----------

50	150	9,3	
9,00			
65	165	9,7	
12,00			
80	130	7	9,5
100	140	7,2	11,4
125	150	7,5	14,6
150	160	7,8	18,7
200	180	8,4	31

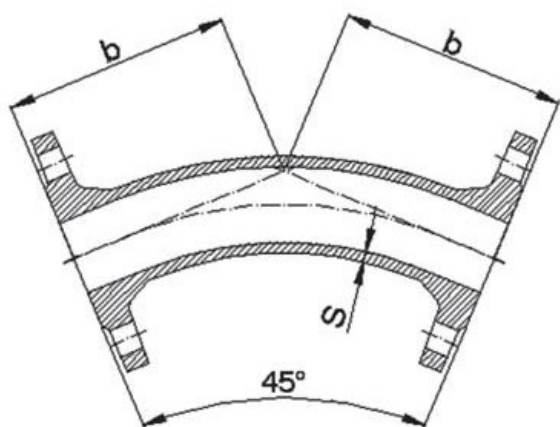

250	350	9	60
300	400	9,6	84
350	298	16,3	
115,00			
400	324	17,5	
149,00			
450	350	18,7	
185,00			
500	375	19,8	
231,00			
600	426	22,2	
342,00			

Težine elemenata mogu varirati u zavisnosti od proizvođača.